


The PT5CN cable extension position transducer communicates linear position via the CANbus SAE J1939 interface providing a precision position feedback to your PLC. The PT5DN is offered in full stroke ranges up to 250 inches and a thermoplastic measuring cable for high cycle and rugged applications.

Because the PT5CN uses a potentiometer as its sensing element, the position signal is “absolute” and does not have to be reset to a “home” position upon startup.

### Output Signal

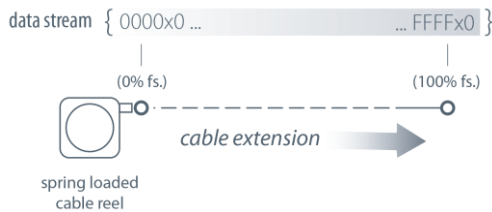

## PT5CN

### Cable Actuated Sensor CANbus • SAE J1939 Output Signal

**Absolute Linear Position to 250 inches (6350 mm)**

**Hard Anodized Aluminum Enclosure**

**High Cycle Applications**

**IP67 • NEMA 6 Protection**

### General

<b>Full Stroke Ranges</b>	0-10 to 0-250 inches
<b>Electrical Interface</b>	CANbus SAE J1939
<b>Protocol</b>	Proprietary B
<b>Accuracy</b>	± 0.25% to ± 0.10% full stroke (see ordering info)
<b>Repeatability</b>	± 0.02% full stroke (see ordering info)
<b>Resolution</b>	± 0.003% full stroke
<b>Measuring Cable</b>	stainless steel or thermoplastic
<b>Enclosure Material</b>	hard anodized aluminum
<b>Sensor</b>	plastic-hybrid precision potentiometer
<b>Potentiometer Cycle Life</b>	see ordering information
<b>Maximum Retraction Acceleration</b>	see ordering information
<b>Weight</b>	5 lbs. max.


### Electrical

<b>Input Voltage</b>	7 - 18 VDC
<b>Input Current</b>	60 mA max.
<b>Baud Rate</b>	125K, 250K, or 500K via DIP switches
<b>Update Rate</b>	10 ms. (20 ms. available—contact factory)

### Environmental

<b>Environmental Suitability</b>	NEMA 4/6, IP 65/67
<b>Operating Temperature</b>	-40° to 185°F (-40° to 85°C)
<b>Vibration</b>	up to 10 g to 2000 Hz maximum

# I/O Format and Settings

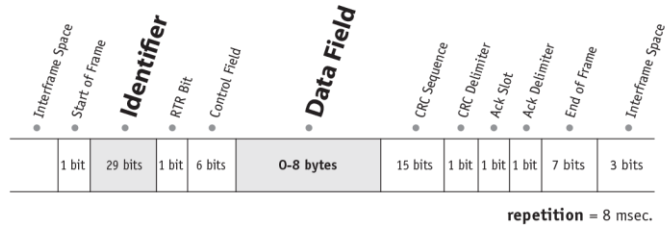

## • Identifier


	Message Priority					Future Use					J1939 Reference Proprietary B								Data Field Type*								Not Used		Node ID**							
Example	1	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	1	0	1	0	0	1	1	0	0	1	1	1	1	1	1	1	1			
Identifier Bit No.	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
Hex Value	0					F					F					5				3				3		F										

\*Sensor field data can be factory set to customer specific value. \*\*Customer defined, set via Dips 1-6. Bit values shown for example only, see **Address Setting** below.

## • Data Field

- B<sub>0</sub> = LSB current % of measurement range byte
- B<sub>1</sub> = MSB current % of measurement range byte
- B<sub>2</sub> = LSB current measurement count byte
- B<sub>3</sub> = MSB current measurement count byte

- B<sub>4</sub> = error flag
- B<sub>5</sub> = error flag
- B<sub>6</sub> = LSB velocity data byte
- B<sub>7</sub> = MSB velocity data byte

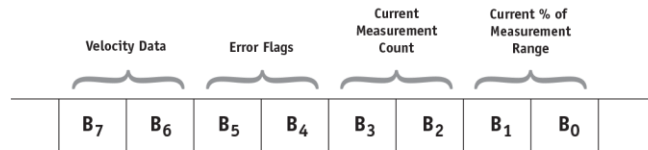

### Current Measurement Count

The Current Measurement Count (CMC) is the output data that indicates the present position of the measuring cable. The CMC is a 16-bit value that occupies bytes B<sub>2</sub> and B<sub>3</sub> of the data field. B<sub>2</sub> is the LSB (least significant byte) and B<sub>3</sub> is the MSB (most significant byte).

The CMC starts at 0x0000 with the measuring cable fully retracted and continues upward to the end of the stroke range stopping at 0xFFFF. This holds true for all ranges.

### Converting CMC to Linear Measurement

To convert the current measurement count to inches or millimeters, simply divide the count by 65,535 (total counts over the range) and then multiply that value by the full stroke range:

$$\left( \frac{\text{current measurement count}}{65,535} \right) \times \text{full stroke range}$$


Sample Conversion:

If the full stroke range is 30 inches and the current position is 0x0FF2 (4082 Decimal) then,

$$\left( \frac{4082}{65,535} \right) \times 30.00 \text{ inches} = 1.87 \text{ inches}$$

If the full stroke range is 625 mm and the current position is 0x0FF2 (4082 Decimal) then,

$$\left( \frac{4082}{65,535} \right) \times 625 \text{ mm} = 39 \text{ mm}$$



### Current % of Measurement Range

The Current % of Measurement Range is a 2-byte value that expresses the current linear position as a percentage of the entire full stroke range. Resolution is .1 % of the full stroke measurement range.

This value starts at 0x0000 at the beginning of the stroke and ends at 0x03E8.

Example:

Hex	Decimal	Percent
0000	0000	0.0%
0001	0001	0.1%
0002	0002	0.2%
...	...	...
03E8	1000	100.0%




### Error Flags

0x55 (yellow LED on controller board) indicates that the sensor has begun to travel beyond the calibrated range of the internal position potentiometer.

0xAA (red LED on controller board) indicates that the sensor has moved well beyond the calibrated range of the internal position potentiometer.

If either error flag occurs within the full stroke range of the sensor, the unit should be returned to the factory for repair and recalibration.



### Velocity

Data in bytes B<sub>7</sub> - B<sub>6</sub> is the change in the CMC (current measurement count) over a 100 msec time period. This data can then be used to calculate velocity in a post processing operation.

B <sub>7</sub> - B <sub>6</sub> HEX (Decimal)	max "reverse" velocity	max "forward" velocity	Velocity (cts./100 msec.)
0x0000 (0)			- 32767 counts
0x7FFF (32767)			"0" counts (no change)
0xFFFF (65535)			32767 counts

### Velocity Calculation

$$\left( \frac{\text{count change} - 32767}{.1 \text{ sec. time period}} \right) \times \left( \frac{\text{full stroke range}}{65,535} \right)$$

#### Sample Calculations

Cable Extension (positive direction):

B<sub>7</sub>-B<sub>6</sub> = 0x89C6 (43462 Dec), full stroke = 60 in.

$$\left( \frac{35270 - 32767}{.1 \text{ sec}} \right) \times \left( \frac{60 \text{ in.}}{65,535} \right) = 22.92 \text{ in. / sec.}$$

Cable Retraction (negative direction):

B<sub>7</sub>-B<sub>6</sub> = 0x61A8 (25000 Dec), full stroke = 60 in.

$$\left( \frac{25000 - 32767}{.1 \text{ sec}} \right) \times \left( \frac{60 \text{ in.}}{65,535} \right) = - 71.11 \text{ in. / sec.}$$

## Setting the Address (Node ID) and Baud Rate

### Address Setting (Node ID)

The Address Setting (Node ID) is set via 6 switches located on the 8-pole DIP switch found on the DeviceNET controller board located inside the transducer.


The DIP switch settings are binary starting with switch number 1 (= 2<sup>0</sup>) and ending with switch number 6 (= 2<sup>5</sup>).

### Baud Rate

The transmission baud rate may be either factory preset at the time of order or set manually at the time of installation.

The baud rate can be set using switches 7 & 8 on the 8-pole DIP switch found on the DeviceNET controller board located inside the transducer.

### CANBus Controller Board

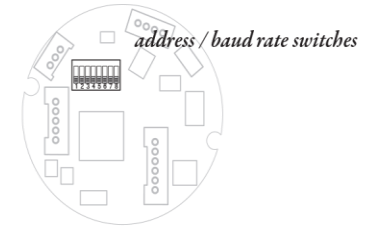


DIP-1 (2 <sup>0</sup> )	DIP-2 (2 <sup>1</sup> )	DIP-3 (2 <sup>2</sup> )	DIP-4 (2 <sup>3</sup> )	DIP-5 (2 <sup>4</sup> )	DIP-6 (2 <sup>5</sup> )	address (decimal)
0	0	0	0	0	0	0
1	0	0	0	0	0	1
0	1	0	0	0	0	2
...	...	...	...	...	...	...
1	1	1	1	1	1	63

DIP-7	DIP-8	baud rate
0	0	125k
1	0	250k
0	1	500k
1	1	125k





**internal dip switches & controller board**  
to gain access to the controller board, remove four Allen-Head Screws and remove end cover bracket.

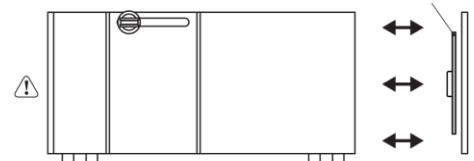


**Caution! Do Not Remove Spring-Side End Cover**  
removing spring-side end cover could cause spring to become unseated and permanently damaged.

## Outline Drawing

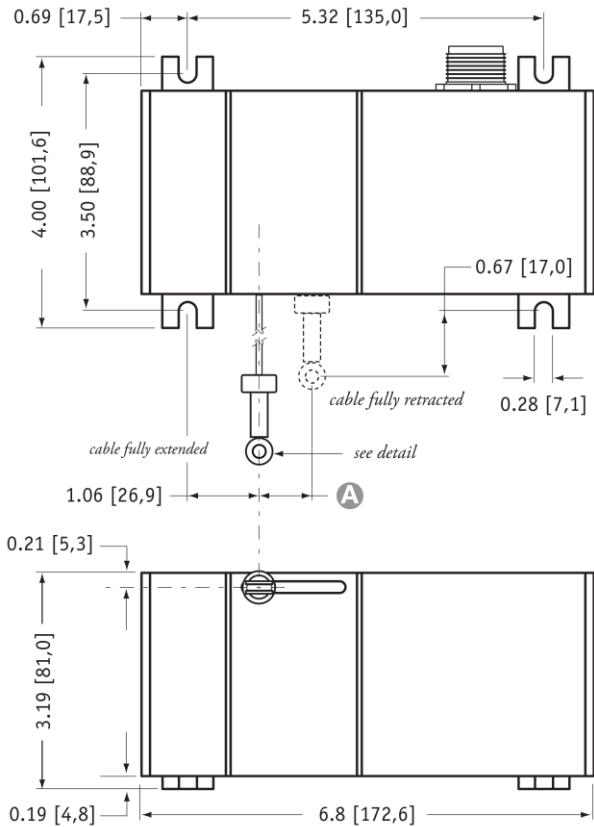

### A DIMENSION (inches[mm])

RANGE	N34 measuring cable	S47 & V62 measuring cable
10	0.05 [1,2]	0.08 [2,0]
15	0.07 [1,8]	0.12 [3,0]
20	0.09 [2,4]	0.16 [3,9]
30	0.14 [3,5]	0.23 [5,9]
40	0.19 [4,7]	0.31 [7,9]
50	0.23 [5,9]	0.39 [9,9]
60	0.28 [7,0]	0.47 [11,8]
80	0.37 [9,4]	0.62 [15,8]
100	0.46 [11,7]	0.78 [19,7]
125	0.58 [14,7]	0.97 [24,7]
150	0.69 [17,6]	1.16 [29,6]
200	0.92 [23,5]	n/a
250	1.16 [29,3]	n/a

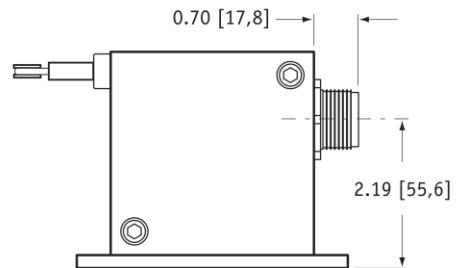

DIMENSIONS ARE IN INCHES [MM]  
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

\* tolerance = +.005 -.001 [+.13 -.03]  
\*\* tolerance = +.005 -.005 [+1.3 -.13]



# PT5CN


CANbus • SAE J1939 Output Signal

## Electrical Connection:

order code:



### blank

5-pin micro-connector  
(no mating plug supplied)




### MC5

5-pin micro-connector  
w/ mating plug




### SC5

5-pin micro-connector  
and 5 meter length cordset  
w/straight mating plug



### NC5

5-pin micro-connector  
and 5 meter length cordset  
w/90° mating plug



pin	signal	wire color
1	drain	brown
2	V+	white
3	V-	blue
4	Can-H	black
5	Can-L	grey

## NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity company  
20630 Plummer Street  
Chatsworth, CA 91311  
Tel +1 800 423 5483  
Tel +1 818 701 2750  
Fax +1 818 701 2799  
info@celesco.com

## TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

PT5CN 12/01/2015