



Medium size standard AC current sensor with large aperture and output wire type



Model CTL-24-TE


- [Features]**
- Large aperture of $\phi 24$ aperture diameter. Medium size standard current sensor
 - Corresponded to high current until 320A max
 - Possible to interface to electrical circuit directly by small secondary current with high current ratio of 1000:1
 - Output wire ($0.3\text{mm}^2 \times 100\Omega$).
 - Prepared mounting bracket sold separately (HLD-24) for panel mounting

AC current sensor

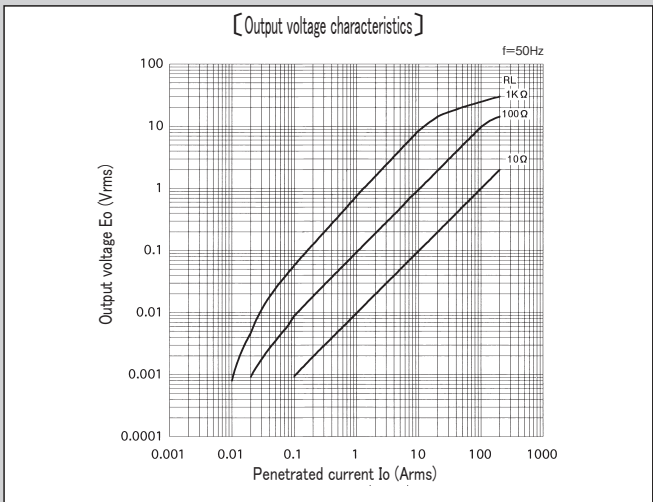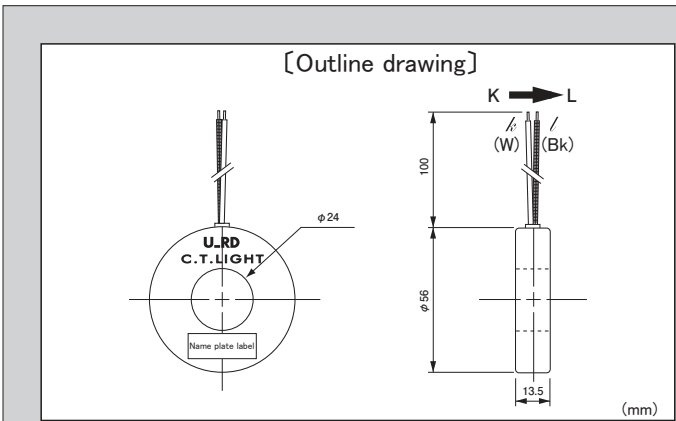

[Specification] Ta=25°C

Model	CTL-24-TE
Primary current	0.1 ~ 320Arms (50 / 60Hz)、 $R_L \leq 10\Omega$
Maximum primary current	320Arms continuous
Saturation limited current	600Arms (50 / 60Hz)、 $R_L \leq 1\Omega$
Output characteristics	Refer "Output voltage characteristics"
Linearity	Refer "Coupling efficiency [K] characteristics" (Use the flat range of [K] characteristic in the application as the linear sensor)
Secondary windings (n)	1000 ± 2 turn
Secondary windings resistance	19Ω (reference)
Withstand voltage	AC2000V(50/60Hz), 1min(between aperture and output wire in a lump)
Insulation resistance	DC500V, $\geq 100M\Omega$ (between aperture and output wire in a lump)
Operating temperature	-20°C ~ +75°C, $\leq 80\%RH$, no condensation
Storage temperature	-30°C ~ +90°C, $\leq 80\%RH$, no condensation
Structure	Polycarbonate plastic case, potted by epoxy
Output wire	PVC Vinyl isolated wire ($0.3\text{mm}^2 \times 100\Omega$)
Mass	approximately 62g

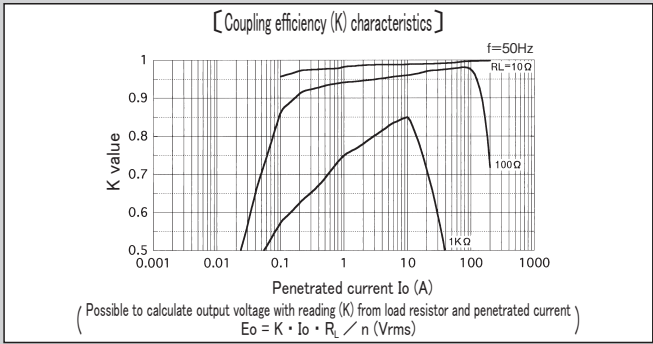

- Remark**
- (1) Output voltage is changed by the penetrated current/load resistor/[K] characteristic and so on. Please set up the condition for use with careful investigation of each characteristic
 - (2) Please use with enough margin if the range of coupling efficiency [K] ≤ 0.9 , because it is the range to happen the individual difference.
 - (3) Opening the secondary during turn ON is hazardous and the cause of failure, because of generating high voltage
 - (4) Please surely ask to our technical consulting service, if the power measurement is thought.
 - (5) Please be careful of CT heating in case to use with high frequency, although this CT is basically used at 50/60Hz.
 - (6) Please refer Appendix-1 accessories list for accessories

