


PEARSON™ CURRENT MONITOR MODEL 2100

Sensitivity	1.0 Volt/Ampere +1/-0%
Output resistance	50 Ohms
Maximum peak current	500 Amperes
Maximum rms current	7.5 Amperes
Drop rate	0.08 %/microsecond
Useable rise time	20 nanoseconds
Current time product	0.005 Ampere-second maximum*
Low frequency 3dB cut-off	125 Hz (approximate)
High frequency 3dB cut-off	20 MHz (approximate)
I/f figure	0.017 peak Amperes/Hz
Output connector	BNC (UG-290A/U)
Operating temperature	0 to 65 °C
Weight	21 ounces

* Maximum current-time product can be obtained by using core-reset bias as described in the *Application Notes*.
0.002 Ampere-second is typical without bias.

© 1999 Pearson Electronics, Inc. 2100.SPX_990506

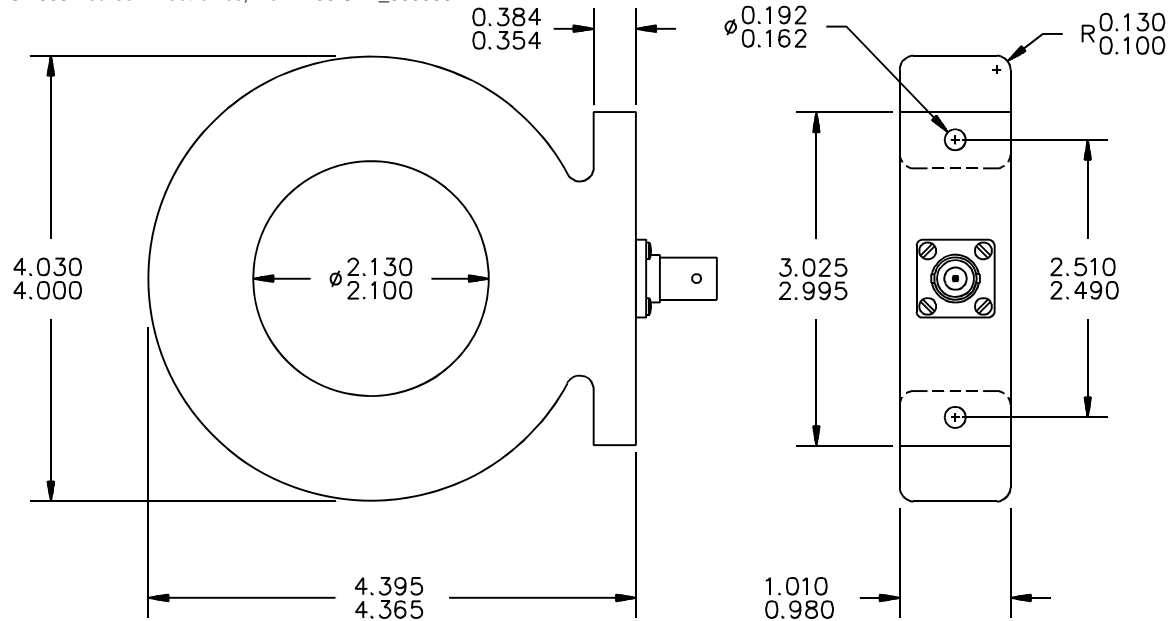

Pearson Electronics, Inc. • 4009 Transport Street • Palo Alto, CA 94303
Telephone 650-494-6444 • FAX 650-494-6716 • www.pearsonelectronics.com

擎昇實業有限公司 **TOPE Co., Ltd.**

Tel: (02) 8228-0658 • Fax: (02) 8228-0659 • e-mail: tope@ms1.hinet.net • <http://www.sensor.tw>