


4.5" [114 mm]




2.4" [59 mm]

The RT9510 is an incredibly simple device which provides a regulated 0...10 VDC rotational-position feedback signal with a 14.5...40 VDC unregulated input voltage.

This innovative sensor from Celesco, designed to meet tough NEMA-4 and IP67 environmental standards, is available in full-stroke measurement ranges of 1/4 to 50 turns. Because the sensor is potentiometric, the RT9510 is absolute and will maintain position information even after a loss of power.

Output Signal

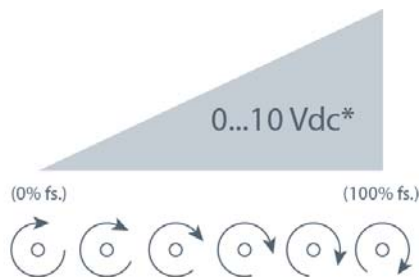

*Optional 0...5 Vdc output signal available.

RT9510

0–90° to 0–50 Turns • 0...5, 0...10 VDC

Industrial Grade Rotational Position Sensor

Absolute Rotary Position up to 50 turns

Aluminum or Stainless Steel Enclosure Options

IP68 / NEMA 6

General

Full Stroke Range	0-0.25 to 0-50 turns
Output Signal Options	0...5, 0...10 VDC
Accuracy	0.15% to 0.3% full stroke, see ordering information
Repeatability	± 0.05% full stroke
Resolution	essentially infinite
Enclosure Material Options	powder-painted aluminum or stainless steel
Sensor	plastic-hybrid precision potentiometer
Potentiometer Cycle Life	see ordering information
Shaft Loading	up to 35 lbs. radial and 5 lbs. axial
Weight, Aluminum (Stainless Steel) Enclosure	3 lbs. (6 lbs.) max.

Electrical

Input Voltage	14.5-40 VDC (10.5-40 VDC for 0...5 volt output)
Input Current	10 mA max.
Output Impedance	1000 ohms
Maximum Load	5000 ohms.
Zero Adjustment	from factory set zero to 50% of full stroke range
Span Adjustment	to 50% of factory set span

EMC COMPLIANCE PER DIRECTIVE 89/336/EEC


Emission/Immunity	EN50081-2/EN50082-2
--------------------------	---------------------

Environmental

Enclosure	NEMA 4/4X/6, IP 67/68
Operating Temperature	-40° to 200°F (-40° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum

RT9510

0–90° to 0–50 Turns • 0...5, 0...10 Vdc

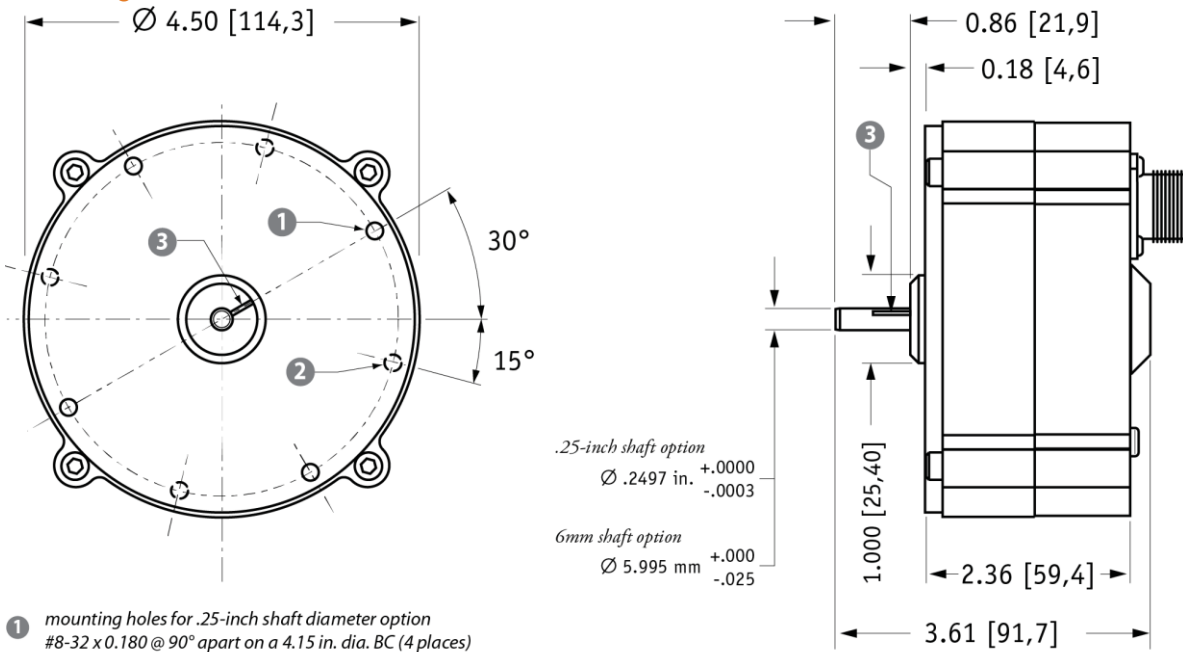Outline Drawing

- ① mounting holes for .25-inch shaft diameter option
#8-32 x 0.180 @ 90° apart on a 4.15 in. dia. BC (4 places)
- ② mounting holes for 6-mm shaft diameter option
M4 x 4.5 mm @ 90° apart on a 105,4 mm dia. BC (4 places)
- ③ reference mark
full counter-clockwise position - align mark on shaft to mark on face for start of measurement range

DIMENSIONS ARE IN INCHES [MM]
 tolerances are ± 0.02 in. [± 0.5 mm] unless otherwise noted

Ordering Information**Model Number:**

RT9510 - - - **1** - **1** - - - **0**

order code: R A B C D E F G

Sample Model Number:

RT9510 - 0005 - 111 - 1110

- R** range: 5 turns (clockwise shaft rotations)
- A** enclosure: aluminum
- B** shaft diameter: .25 inches
- E** output signal: 0...10 VDC signal increasing clockwise
- F** electrical connection: 6-pin plastic connector

Full Stroke Range:





R order code:	R125	0R25	0R50	0001	0002	0003	0005	0010	0020	0030	0050
clockwise shaft rotations, min:	0.125	0.25	0.50	1	2	3	5	10	20	30	50
accuracy (% of f.s.):	0.3%	0.3%	0.3%	0.3%	0.3%	0.3%	0.2%	0.15%	0.15%	0.15%	0.15%
potentiometer cycle life*:	2.5×10^6	2.5×10^6	2.5×10^6	2.5×10^6	2.5×10^6	2.5×10^6	5×10^5	2.5×10^5	2.5×10^5	2.5×10^5	2.5×10^5

*—number of times the sensor shaft can be cycled back and forth from beginning to end and back to the beginning before any measurable signal degradation may occur.

Enclosure Material:

A order code:	1	2
	powder-painted aluminum	303 stainless steel

Shaft Diameter:

B order code:	1	2	3	4
	.25-in. diameter	6 mm diameter	.25-in. dia. w/flats	6 mm dia. w/flats
	 .2497 in. (+.0000 - .0003)	 5.995 mm (+.000 - .025)	 0.33 in. \leftarrow \rightarrow 0.025 in.	 8.4 mm \leftarrow \rightarrow 0.64 mm

RT9510

0–90° to 0–50 Turns • 0...5, 0...10 Vdc

Output Signals:

order code: output signal options:

1	2	3	4
0...10 VDC	10...0 VDC	0...5 VDC	5...0 VDC
input voltage: 14.5...40 VDC		input voltage: 10.5...40 VDC	

Example:

ordercode = 1 = 0...10 VDC

= 0 VDC (max ccw)
 = 10 VDC (max cw)

Electrical Connection:

order code:

1	2	3	4																
6-pin plastic connector w/mating plug IP 67, NEMA 4X**, 6	10-ft. [3 M] waterproof cable IP 67, NEMA 4X**, 6	6-pin metal connector w/mating plug IP 65, NEMA 4	25-ft. [7.5 M] instrumentation cable IP 67, NEMA 6																
1/2 - 5/16" [14 - 8 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW	3/8-in. [9 mm] max cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	25 ft. x 0.2-in. dia. [7.5 M x 5 mm dia.] 24 AWG, shielded																
5	6	7																	
100-ft. [30 M] waterproof cable IP 67, NEMA 4X**, 6	10-ft. [3 M] pressure tested* waterproof cable IP 68, NEMA 4X**, 6P	100-ft. [30 M] pressure tested* waterproof cable IP 68, NEMA 4X**, 6P																	
100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW	10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW	100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW																	
6-pin Mating Plug <table border="0"> <tr> <td>pin</td> <td>signal</td> </tr> <tr> <td>A</td> <td>input voltage</td> </tr> <tr> <td>B</td> <td>output signal</td> </tr> <tr> <td>C</td> <td>common</td> </tr> </table> <p>contact view</p>		pin	signal	A	input voltage	B	output signal	C	common	Waterproof Cable <table border="0"> <tr> <td>color code</td> <td>signal</td> </tr> <tr> <td>WHITE</td> <td>input voltage</td> </tr> <tr> <td>GREEN</td> <td>output signal</td> </tr> <tr> <td>BLACK</td> <td>common</td> </tr> </table>		color code	signal	WHITE	input voltage	GREEN	output signal	BLACK	common
pin	signal																		
A	input voltage																		
B	output signal																		
C	common																		
color code	signal																		
WHITE	input voltage																		
GREEN	output signal																		
BLACK	common																		
		Instrumentation Cable <table border="0"> <tr> <td>color code</td> <td>signal</td> </tr> <tr> <td>RED</td> <td>input voltage</td> </tr> <tr> <td>GREEN</td> <td>output signal</td> </tr> <tr> <td>BLACK</td> <td>common</td> </tr> </table>		color code	signal	RED	input voltage	GREEN	output signal	BLACK	common								
color code	signal																		
RED	input voltage																		
GREEN	output signal																		
BLACK	common																		


*—Test pressure: 100 feet [30 meters] H₂O (40 PSID); Test Medium: Air; Duration: 2 hours. **—Applies to stainless steel enclosure only.

RT9510

0–90° to 0–50 Turns • 0...5, 0...10 Vdc

Output Signal Selection:

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match signal values to the beginning and end points of the stroke.

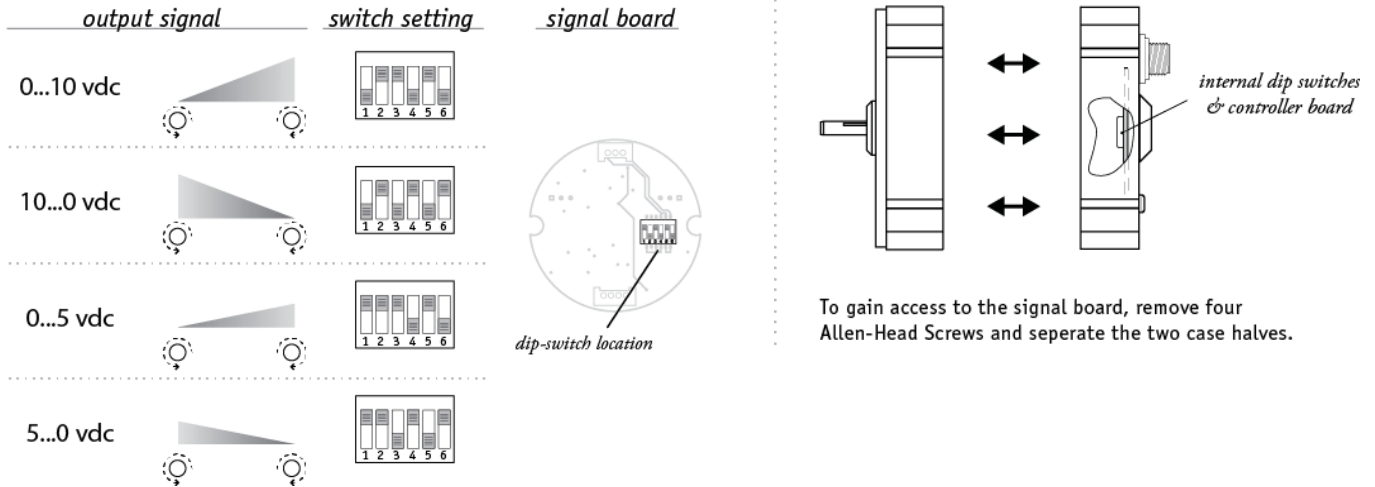

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity company
20630 Plummer Street
Chatsworth, CA 91311
Tel +1 800 423 5483
Tel +1 818 701 2750
Fax +1 818 701 2799
info@celesco.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

RT9510 12/01/2015