



The PT9510 can operate from an unregulated 14.5 to 40 VDC power supply while providing a regulated output signal over its full extended range of up to 1700". It provides a 0 - 10 VDC position feedback signal proportional to the linear movement of its stainless steel measuring cable.

As a member of Celesco's innovative family of NEMA-4 rated cable-extension transducers, the PT9510 offers numerous benefits. It installs in minutes, functions properly without perfectly parallel alignment, and when its cable is retracted, it measures only 6".

Output Signal



*Also Available: 0...5, -5...+5, -10...+10 Vdc

PT9510 (Extended Range)

Cable Actuated Sensor


Extended Ranges • 0...5 Vdc, 0...10
Absolute Linear Position to 1700 inches (4300 cm)

Absolute Ellical Tosition to 1700 mones (4000 cm

Stroke Range Options: 0-600 to 0-1700 inches

VLS Option to Prevent Free-Release Damage

IP68 • NEMA 6 Protection

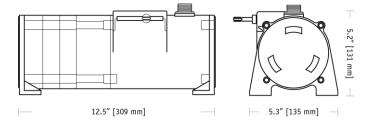

General

Full Stroke Range 0-600 to 0-1700 inches

Output Signal 0...10, 0...5, -5...+5, -10...+10 VDC

Measuring Cable Options stainless steel or thermoplastic

Enclosure Material powder-painted aluminum or 303 stainless steel

Sensor plastic-hybrid precision potentiometer

Potentiometer Cycle Life ≥ 250,000 cycles

Maximum Retraction see ordering information

Acceleration

Maximum Velocitysee ordering informationWeight, Aluminum (Stainless14 lbs. (28 lbs.), max.

Electrical

Steel) Enclosure

Input Voltage 14.5-40VDC (10.5-40VDC for 0-5 volt output)

Input Current10 mA maximumOutput Impedance1000 ohmsMaximum Output Load5000 ohms

Output Signal, Zero Adjust up to 50% of full stroke range
Output Signal, Span Adjust to 50% of factory set span

Environmental

Enclosure NEMA 4/4X/6, IP 67


Operating Temperature -40° to 200°F (-40° to 90°C)


Vibration up to 10 g to 2000 Hz maximum

EMC COMPLIANCE PER DIRECTIVE 89/336/EEC

Emission / Immunity EN50081-2 / EN50082-2


Outline Drawing

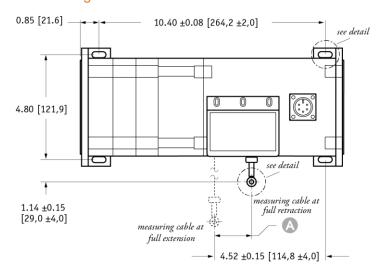


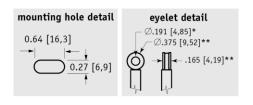

A DIMENSION RANGE inches [mr

RANGE	inches [mm]
600	1.76 [44,7]
800	1.58 [40,1]
1000	1.98 [50,2]
1200	1.98 [50,2]
1500	1.86 [47,2]
1700	2.11 [53.6]

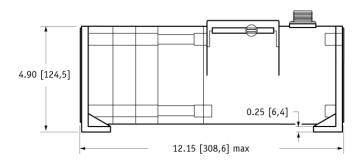

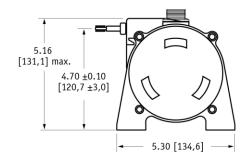

DIMENSIONS ARE IN INCHES [MM] tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

* tolerance = +.005 -.001 [+.13 -.03] ** tolerance = +.005 -.005 [+.13 -.13]

VLS Option - Free Release Protection


The patented Celesco Velocity Limiting System (VLS) is an option for PT9000 Series cable extension transducers that limits cable retraction to a safe 40 to 55 inches per second for the single spring option and 40 to 80 inches per second for the higher tension dual spring option.

The VLS option prevents the measuring cable from ever reaching a damaging velocity during an accidental free release. This option is ideal for mobile applications that require frequent cable disconnection and reconnection. It prevents expensive unscheduled downtime due to accidental cable mishandling or attachment failure.

1. using guide below, select PT9510 model PT9510-1200-111-1110
2. remove "PT" from the model number 9510-1200-111-1110

3. add "VLS" VLS + 9510-1200-111-1110

4. completed model number! VLS9510-1200-111-1110

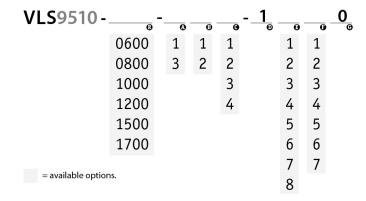

Ordering Information

Model Number:



bare stainless:

Sample Model Number:

PT9510 - 1200 - 111 - 1110

- enclosure/cable tension:
 measuring cable:
 - nylon-coated stainless front 0...10 vdc

500 inches

aluminum

- cable exit: Output signal:

(B) electrical connection: 6-pin plastic connector

(B order code:	0600	0800	1000	1200	1500	1700	
full stroke range, min:	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.	
cable tension (±35%):	27 oz.	24 oz.	20 oz.	19 oz.	18 oz.	17 oz.	

Enclosure Material:

Full Stroke Range:

♠ order code:	1	3
enclosure material:	powder-painted aluminum	303 stainless steel
max. acceleration:	1g	1g
max. velocity:	60 inches/sec.	60 inches/sec.

Measuring Cable:

B order code:	1	2	
cable construction:	construction: nylon-coated stainless steel rope* bare stainless steel rope*		
general use:	indoor	outdoor, debris, high temperature	
	stroke range: 0600 0	0800 1000 1200 1500 1700	
*cable diamet	ter: < nylon-coated stainless: .034 in0	19 in019 in019 in014 in014 in.	

.018 in.

.018 in.


.018 in.

.015 in.


.015 in.

.031 in.


Cable Exit:

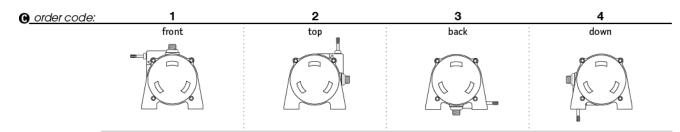


Output Signals:

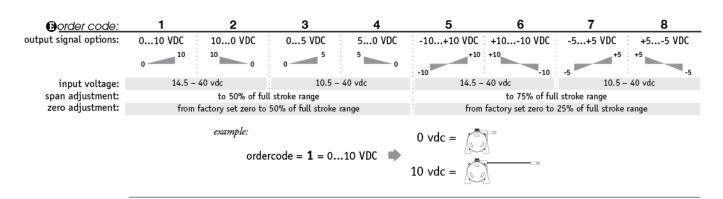

Electrical Connection:

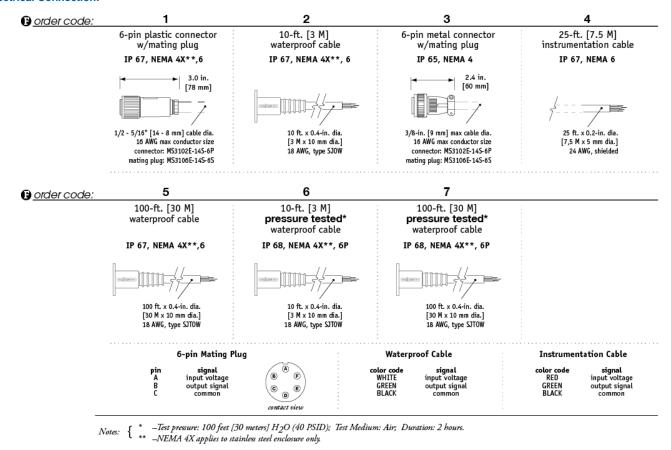


Output Signal Settings (does not apply to -5...+5 & -10...+10 vdc options)

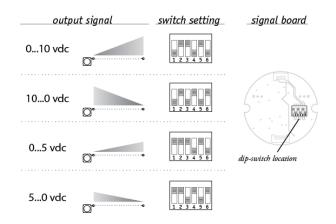

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match signal values to the beginning and end points of the stroke.

To gain access to the signal board, remove four Allen-Head Screws and remove end cover bracket.

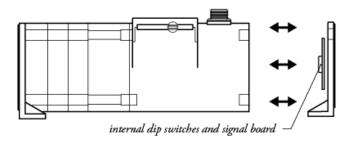



Caution! Do Not Remove Spring-Side End Cover Removing spring-side end cover could cause spring to become unseated and permanently damaged. Extended Ranges • 0...5 Vdc, 0...10

NORTH AMERICA

Measurement Specialties, Inc., a TE Connectivity company 20630 Plummer Street Chatsworth, CA 91311 Tel +1 800 423 5483 Tel +1 818 701 2750

Tel +1 818 701 2750 Fax +1 818 701 2799 info@celesco.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

PT9510 Extended Range 12/01/2015